




# 2016 H2M Squirrel



Oil Pattern Distance	41	Reverse Brush Drop	41	Oil Per Board	45 ul
Forward Oil Total	17.775 mL	Reverse Oil Total	10.8 mL	Volume Oil Total	28.575 mL
Tank Configuration	Only A	Tank A Conditioner	Absolute Control	Tank B Conditioner	Absolute Control

	START	STOP	LOADS	SPEED	BUFFER	CROSSED	START	END	FEET	T.OIL
1	2L	2R	9	22	3	333	0.0	24.9	24.9	14985
2	4L	6R	2	26	3	62	24.9	32.2	7.3	2790
3	2L	2R	0	26	3	0	32.2	41.0	8.8	0

	START	STOP	LOADS	SPEED	BUFFER	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	0	41.0	29.0	-12.0	0
2	8L	8R	1	22	3	25	29.0	25.9	-3.1	1125
3	7L	7R	2	22	3	54	25.9	19.7	-6.2	2430
4	6L	6R	2	22	3	58	19.7	13.5	-6.2	2610
5	4L	5R	1	18	3	32	13.5	11.0	-2.5	1440
6	3L	4R	1	18	3	34	11.0	8.5	-2.5	1530
7	2L	2R	1	18	3	37	8.5	6.0	-2.5	1665
8	2L	2R	0	10	3	0	6.0	0.0	-6.0	0

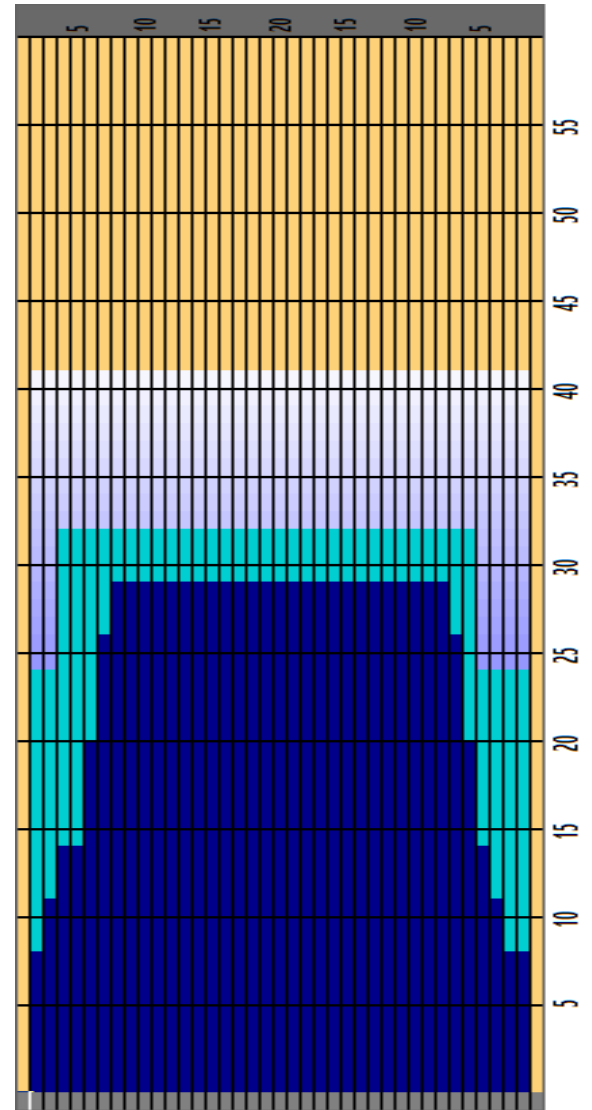

Cleaner Ratio Main Mix                    5:1  
 Cleaner Ratio Back End Mix                5:1  
 Cleaner Ratio Back End Distance         59  
 Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 40

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	1.3	1	1	1	1	1.42

